

### Chemistry 4631

### Instrumental Analysis Lecture 31

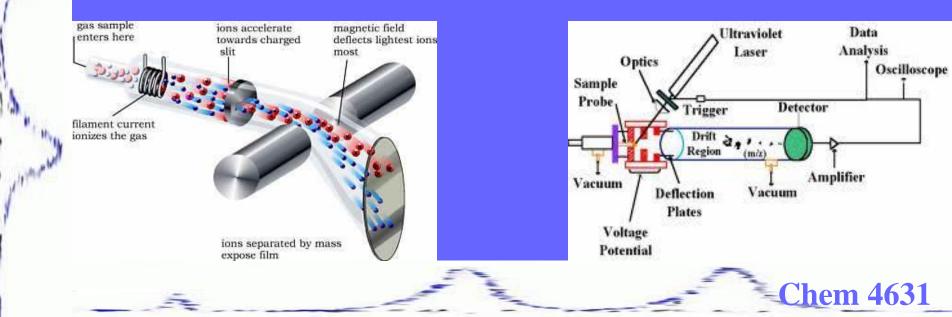

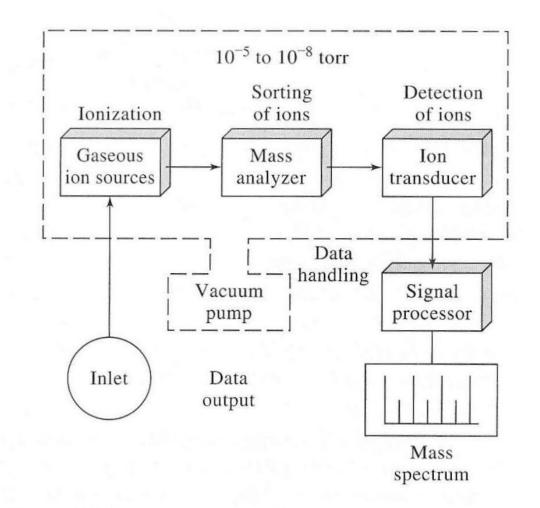

UMA .

Figure 11-1 Components of a mass spectrometer.

**Chem 4631** 

#### Instrumentation

- **Principle components:** 
  - Inlet
  - Ion source
  - Mass analyzer
  - Ion transducer
  - Pumps
  - Signal processor

**Chem 4631** 

#### Instrumentation

- Mass analyzers
- Quadrupole
- Time of Flight
- Double Focusing
- Ion Trap

#### Instrumentation

**Mass Analyzers** 

**Quadrupole Mass Analyzers** 

- Most common type of MS
- Compact less expensive
- Rugged
- High scan rates (entire spectrum in 100 ms)

Mass Spectrometry (MS) Instrumentation <u>Mass Analyzers</u> Quadrupole Mass Analyzers Contains 4 parallel cylindrical rods that serve as electrodes.



#### Instrumentation

#### **Mass Analyzers**

**Quadrupole Mass Analyzers** 

**Opposite rods are connected electrically. Both direct current (DC) and fixed radio frequency (RF) potentials are applied to opposite poles.** 

- One pair to positive side of variable dc source.
- Other pair to negative terminal.
- Also variable radio frequency ac potentials, that are 180 degrees out of phase are applied to each pair.

Instrumentation

Mass Analyzers Quadrupole Mass Analyzers

Ions passing through the analyzer are alternately deflected by and attracted to the poles.


For any specific ratio of RF amplitude and DC voltage only ions with a single mass (m/z) will reach the detector.

The entire range of masses is scanned by systematically changing the RF amplitude and DC voltages while keeping the ratio constant.

#### Instrumentation

**Mass Analyzers** 

**Quadrupole Mass Analyzers** 

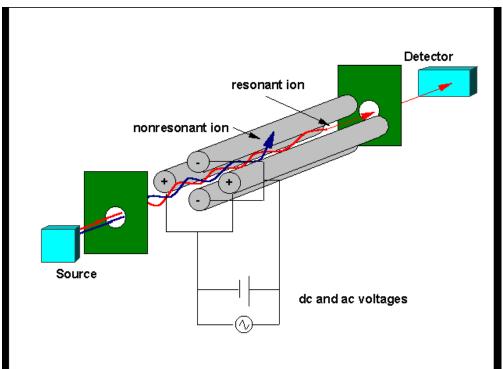




#### Instrumentation

- Mass Analyzers
- **Quadrupole Mass Analyzers**

At any set of conditions, only ions of a specific M/Z can successfully travel through the entire filter.


Others are drawn into the rods.

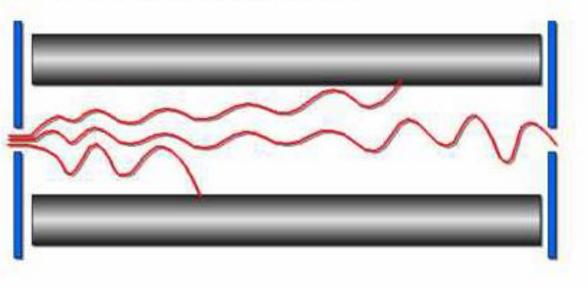



#### Instrumentation

- **Mass Analyzers**
- **Quadrupole Mass Analyzers**

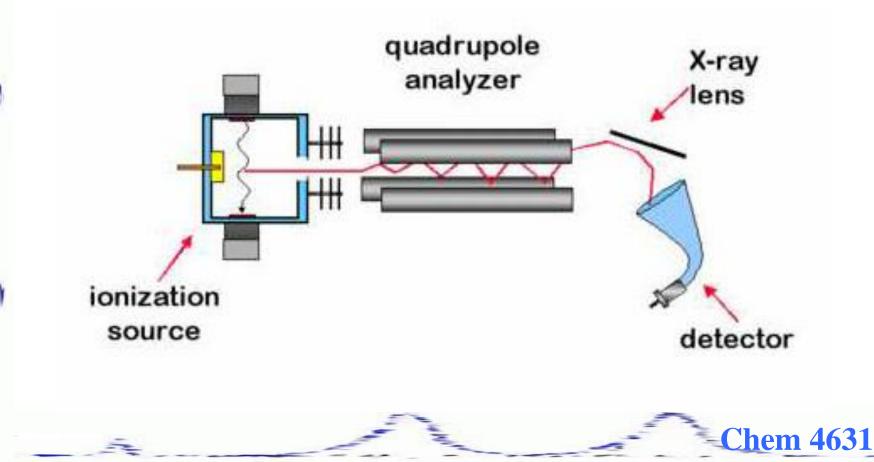

**Chem 4631** 

Instrumentation

**Mass Analyzers** 

#### Quadrupole

#### Advantage

- Simple
- Rugged
- Low cost
- High scan rate

#### Disadvantage

- Must be periodically cleaned
- Range is 0-500 m/z

Instrumentation

**Mass Analyzers** 

**Time of Flight Mass Analyzers** 

Positive ions are produced periodically by bombardment of the sample with brief pulses of electrons, secondary ions, or laser-generated photons.

The pulses have a frequency of 10-50 kHz and lifetimes of 0.25  $\mu s.$ 

**Instrumentation** 

Mass Analyzers

**Time of Flight Mass Analyzers** 

The ions produced are accelerated by an electric field of 10<sup>3</sup> to 10<sup>4</sup> V with the same frequency.

The accelerated particles pass into a field-free drift tube (linear or reflectron) about a meter in length.

Instrumentation

**Mass Analyzers** 


**Time of Flight Mass Analyzers** 

The ions entering the tube have the same kinetic energy but the velocities vary inversely with the ions masses.

Chem 4631

Lighter particles arrive at detector first. Flight times are 1-30 µs.

#### **Time of Flight Mass Analyzers**

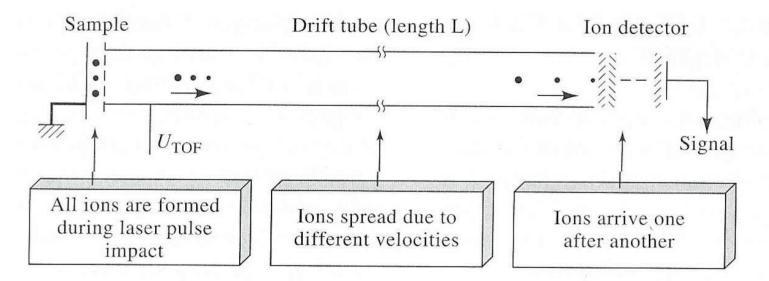


**Figure 11-8** Principle of a time-of-flight mass spectrometer. A bunch of ions produced by a laser probe is accelerated into the drift tube where separation occurs. (From A. H. Verbueken, F. J. Bruynseels, R. Van Grieken, and F. Adams, in Inorganic Mass Spectrometry, p. 186. F. Adams, R. Gijbels, and R. Van Grieken, Eds. New York: Wiley, 1988. With permission.)

Instrumentation

Mass Analyzers

**Time of Flight Mass Analyzers** 

Linear or Reflectron.

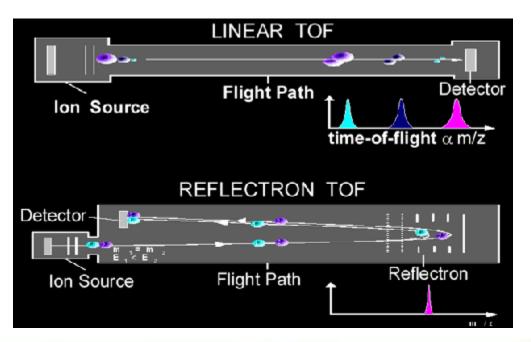



**Chem 4631** 

Instrumentation

**Mass Analyzers** 

**Time of Flight Mass Analyzers** 

Advantage

- Simple
- Rugged
- Unlimited mass range
- Rapid data acquisition

#### Disadvantage

- Poorer resolution
- Less reproducible

Instrumentation

**Mass Analyzers** 

**Double-Focusing Analyzers** 

Focuses a beam of ions using an electrostatic analyzer and a magnetic sector analyzer.

Use an electric field to select ions with a single kinetic energy and a magnetic field to select ions with a single mass-to-charge ratio.

Instrumentation

**Mass Analyzers** 

**Double-Focusing Analyzers** 

Ions from a source are accelerated through a slit into a curves electrostatic field (electrostatic analyzer).

The field focuses the beam of ions through a slit leading into a curved magnetic field according to kinetic energy.

Instrumentation

**Mass Analyzers** 


**Double-Focusing Analyzers** 

In the magnetic field, the lightest ions are deflected most and heaviest ions the least.

Chem 4631

The dispersed ions fall on a detector and are recorded.


#### **Double-Focusing Analyzers**

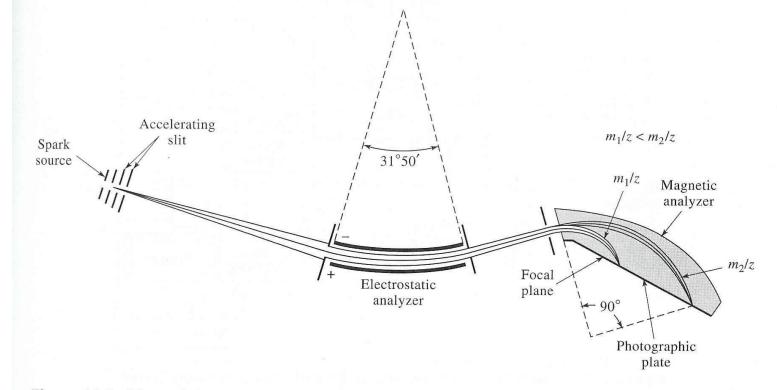


**Chem 4631** 

**Figure 11-9** Mattacuh-Herzog–type double-focusing mass spectrometer. Resolution  $> 10^5$  has been achieved with instruments based on this design.

# Mass Spectrometry (MS) Double-Focusing Analyzers

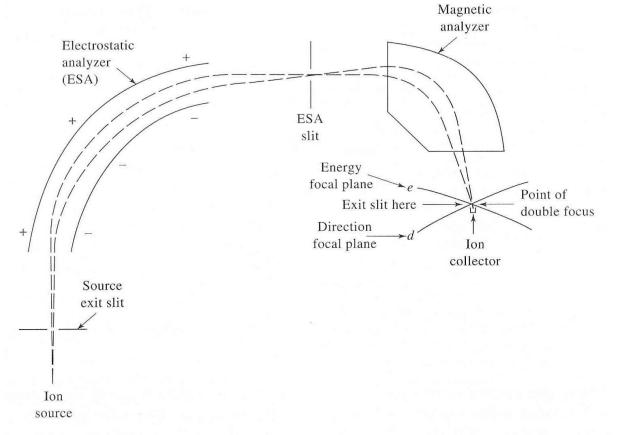



**Mass Spectrometry (MS) Instrumentation Mass Analyzers Double-Focusing Analyzers Kinetic energy of an ion is given by:**  $KE = zeV = \frac{1}{2} mv^2$ m – mass z – charge V – voltage v – velocity  $e - electronic charge (e = 1.60 \times 10^{-19} C)$ 

**Mass Spectrometry (MS)** Instrumentation **Mass Analyzers Double-Focusing Analyzers** Magnetic force, F<sub>m</sub>, given by:  $\mathbf{F}_{m} = \mathbf{B}\mathbf{z}\mathbf{e}\mathbf{V}$ **B** – magnetic field strength **Centripetal Force**, F<sub>c</sub>  $F_{c} = (mv^{2})/r$ **r** – radius of curvature of magnetic sector

Instrumentation

**Mass Analyzers** 

**Double-Focusing Analyzers** 

 $\mathbf{F}_{\mathbf{m}}$  and  $\mathbf{F}_{\mathbf{c}}$  must be equal for ion to travel through sector.

 $\mathbf{m/z} = (\mathbf{B}^2 \mathbf{r}^2 \mathbf{e})/2\mathbf{V}$ 


The mass spectra can be acquired by varying either B, V, or r, while holding others constant.

Usually V and r are constant and B is varied.

**Mass Spectrometry (MS) Instrumentation Mass Analyzers Double-Focusing Analyzers** Have very high resolution (5ppm) and mass accuracy (+/- 0.0001 m/z units).

Also capable of measuring ions with a m/z greater than 10,000.

### Instrumentation Mass Analyzers

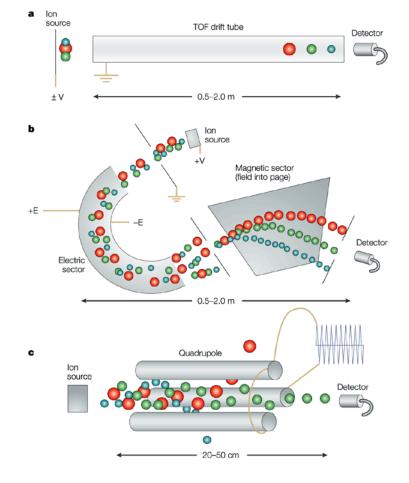

Nature Reviews | Drug Discovery

**Mass Spectrometry (MS) Instrumentation Mass Analyzers Ion Trap Analyzers** A common type is a quadrupole or simple ion trap. **Consist of a central doughnut shaped ring electrode and a** pair of end capped electrodes.

A variable radio-frequency voltage is applied to the ring electrode while the two end electrodes are grounded.


Mass Spectrometry (MS) Instrumentation <u>Mass Analyzers</u> Ion Trap Analyzers

Ions with correct m/z value circulate in a stable orbit.

The mass spectrum is obtained by destabilizing the orbits for individual masses (m/z) one at a time.

When the orbits are destabilized, some of the ions are ejected into the detector.


#### **Ion Trap Analyzer**

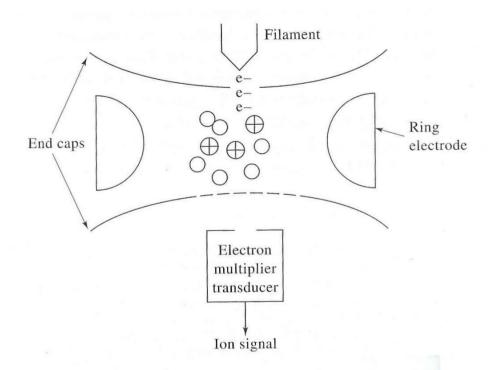

**Figure 20-15** Ion trap mass spectrometer. (*Adapted from J. T. Watson,* Introduction to Mass Spectrometry, *p. 89. Philadelphia: Lippincott-Raven Press, 1997. With permission.*)

#### **Ion Trap Analyzer**

Cross-sectional view of an ion trap.

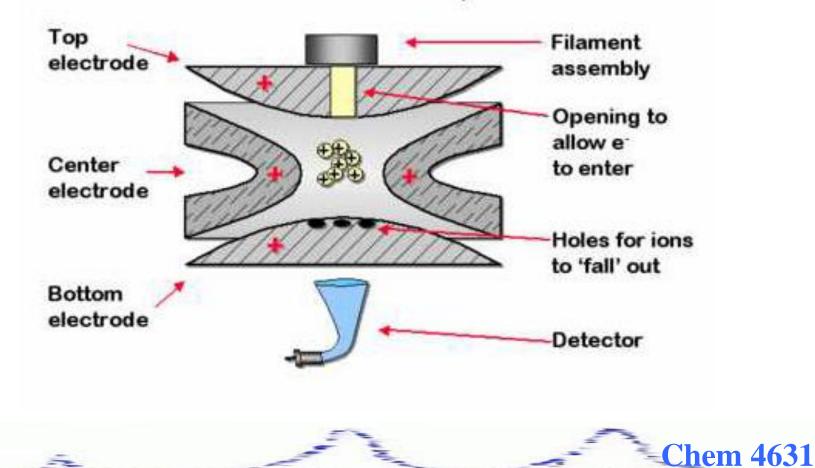

Instrumentation

**Mass Analyzers** 

**Ion Cyclotron Resonance Analyzer (ICR)** 

**Confines gaseous anions or cations by electric and/or magnetic fields.** 

When gaseous ions drift into a strong magnetic field, the motion becomes circular in a plane that is perpendicular to the direction of the field.

**Mass Spectrometry (MS) Instrumentation Mass Analyzers** Ion Trap Analyzer - ICR The angular frequency of this motion is called the cyclotron frequency,  $\omega_c$ .

 $\omega_c = v/r = (zeB)/m$ 

Instrumentation

**Mass Analyzers** 


**Ion Trap Analyzer - ICR** 

The ions trapped in a circular path in a magnetic field can absorb energy from an ac electric field, if the frequencies of the field matches the cyclotron frequency.


The absorbed energy increases the velocity of the ions (and thus the radius).

Only those ions of a matching m/z ratio are set in motion.

#### **Ion Trap Analyzer - ICR**

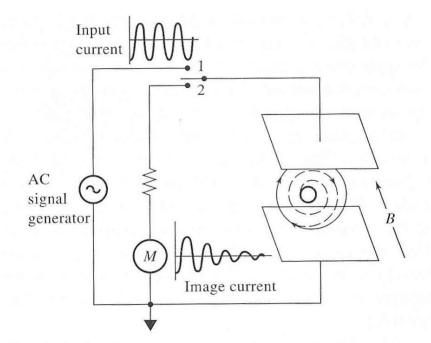

**Figure 20-16** Path of an ion in a strong magnetic field. Inner solid line represents the original circular path of the ion. Dashed line shows spiral path when switch is moved briefly to position 1. Outer solid line is new circular path when switch is again opened.

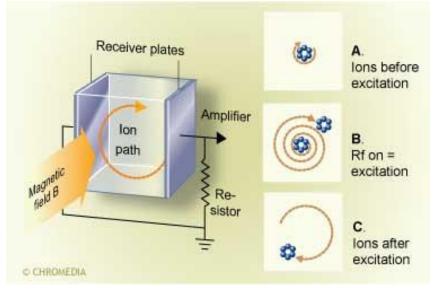

# Assignment

- Read Chapter 11
- Read Chapter 20
- HW 17 Chapter 20: 1-5, 7-11, 17
- HW17 Due 4/29/24

• Test 4